




- ◆ 符合GB/T电子数显指示表国家标准
- ◆ 模拟指针显示
- ◆ 显示屏可旋转320°
- ◆ 按键: 开/关, 置零, 设置公差并显示 Go/No-Go, 测量方向转换, 最大值/最小值/跳动, 设置初始值, 公/英制转换, 数据输出, 相对/绝对测量转换
- ◆ 重启后仍保留预先设置的初始值和公差
- ◆ 自动关机
- ◆ 带数据输出(数据线货号: 200-01或200-02)
- ◆ 带平后盖和带耳后盖




216-010-01




单位: mm

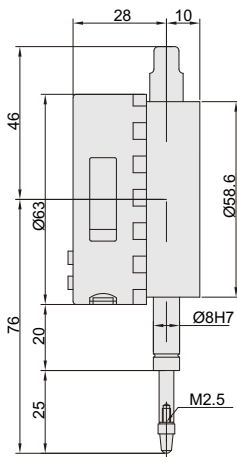

量程: 0-12.7mm

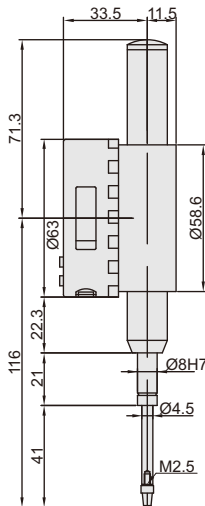

量程: 0-25.4mm

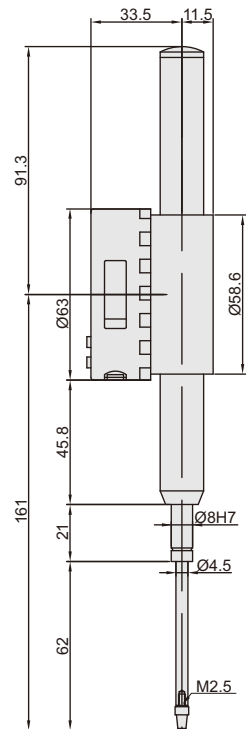

量程: 0-50.8mm

表/表座

分辨率: 0.001mm/0.00005"

| 货号 | 量程 | 全程精度 | 回程精度 |
|------------|-------------|------|------|
| 216-010-01 | 12.7mm/0.5" | 5μm | 2μm |
| 216-025-01 | 25.4mm/1" | 5μm | 3μm |
| 216-050-01 | 50.8mm/2" | 6μm | 3μm |

分辨率: 0.002mm/0.0005"

| 货号 | 量程 | 全程精度 | 回程精度 |
|------------|-------------|------|------|
| 216-010-11 | 12.7mm/0.5" | 20μm | 10μm |
| 216-025-11 | 25.4mm/1" | 20μm | 10μm |
| 216-050-11 | 50.8mm/2" | 30μm | 10μm |

测头(可选配)



夹持

