





313-001-01C

- ◆ 符合JJG外径千分尺国家计量检定规程
- ◆ 分辨率: 0.001mm/0.00005"
- ◆ IP65 防护等级
- ◆ 按键功能: 开/关机/置零, 公英制转换/绝对相对测量转换
- ◆ 自动关机
- ◆ 硬质合金量面, 棘轮测力
- ◆ 配标准杆(313-001-01C除外)

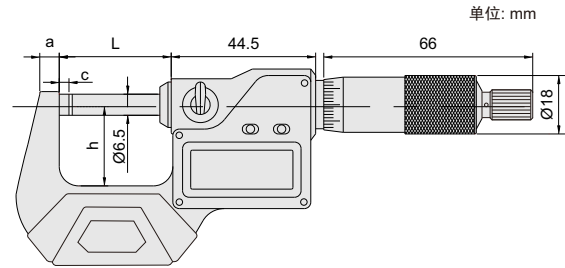

标准杆(标配)

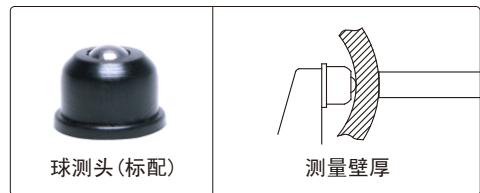

货号	量程	精度	a	c	h	L	标准杆(标配)
313-001-01C *	0-25mm/0-1"	±2μm	6	3	25	34.5	-
313-002-01C *	25-50mm/1-2"	±2μm	8	3	32	59.5	25mm
313-003-01C *	50-75mm/2-3"	±3μm	8	3	44.5	84.5	50mm
313-004-01C *	75-100mm/3-4"	±3μm	8	3	57	109.5	75mm
313-005-01C	100-125mm/4-5"	±3μm	10	3	70	135	100mm
313-006-01C	125-150mm/5-6"	±3μm	10	3	82	160.5	125mm
313-007-01C	150-175mm/6-7"	±4μm	12	5.5	94.5	186	150mm
313-008-01C	175-200mm/7-8"	±4μm	12	5.5	107	211.5	175mm

套装

货号	量程	数量	包含千分尺的量程	包装
313-003-03C *	0-75mm/0-3"	3个	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3"	吹塑盒
313-004-04C *	0-100mm/0-4"	4个	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3", 75-100mm/3-4"	吹塑盒
313-006-06C	0-150mm/0-6"	6个	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3", 75-100mm/3-4", 100-125mm/4-5", 125-150mm/5-6"	铝盒

\* 带生产厂检验证书