

数显螺纹千分尺

333系列





ACCUD


- ◆ 符合JJG螺纹千分尺检定规程
- ◆ 用于测量螺纹中径
- ◆ 分辨率: 0.001mm/0.00005"
- ◆ 按键: 开/关, 初始值设置, 公/英制转换, 相对/绝对测量转换
- ◆ 数据接口
- ◆ 自动关机
- ◆ 直进式, 测头不旋转
- ◆ 棘轮测力
- ◆ 配60°标准杆(除333-001-01外)
- ◆ 可选附件: 55°标准杆, 测头



333-001-01

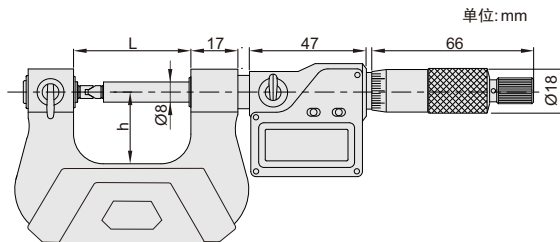

标准杆



货号	量程	微分头精度	L	h	标准杆(标配)
333-001-01	0-25mm/0-1"	±4μm	42	26	-
333-002-01	25-50mm/1-2"	±4μm	67	38	25mm
333-003-01	50-75mm/2-3"	±5μm	92	50	50mm
333-004-01	75-100mm/3-4"	±5μm	117.6	62	75mm
333-005-01	100-125mm/4-5"	±6μm	143	70	100mm
333-006-01	125-150mm/5-6"	±6μm	168	82	125mm
333-007-01	150-175mm/6-7"	±7μm	192	94.5	150mm
333-008-01	175-200mm/7-8"	±7μm	217	107	175mm
333-009-01	200-225mm/8-9"	±8μm	242	130	200mm
333-010-01	225-250mm/9-10"	±8μm	267	142	225mm
333-011-01	250-275mm/10-11"	±9μm	291	155	250mm
333-012-01	275-300mm/11-12"	±9μm	317	167	275mm

安装测头后精度

螺距	测量范围(mm)							
	0-25	25-50	50-75	75-100	100-125	125-200	225-250	250-275
0.4-0.5	±0.01	-	-	-	-	-	-	-
0.6-0.8	±0.01	±0.013	-	-	-	-	-	-
1-1.25	±0.012	±0.015	±0.017	±0.017	-	-	-	-
1.5-2.0	±0.014	±0.017	±0.019	±0.019	±0.020	±0.023	±0.025	±0.028
2.5-3.5	±0.016	±0.019	±0.021	±0.021	±0.023	±0.025	±0.028	±0.031
4.0-7.0	-	±0.021	±0.023	±0.023	±0.025	±0.028	±0.031	±0.033

千分尺